

LANTRONIX®

XPort® Pro™



XPort Pro™ Integration Guide

Part Number 900-557
Revision A September 2009

Copyright and Trademark

© 2009, Lantronix. All rights reserved. No part of the contents of this book may be transmitted or reproduced in any form or by any means without the written permission of Lantronix. Printed in the United States of America.

XPort Pro is a trademark of Lantronix.

Ethernet is a trademark of XEROX Corporation. UNIX is a registered trademark of The Open Group. Windows 95, Windows 98, Windows 2000, Windows NT, and Windows XP are trademarks of Microsoft Corp. Netscape is a trademark of Netscape Communications Corporation.

Contacts

Lantronix Corporate Headquarters

15353 Barranca Parkway
Irvine, CA 92618, USA
Phone: 949-453-3990
Fax: 949-450-7249

Technical Support

Online: www.lantronix.com/support
Email/Chat: www.lantronix.com/support

Sales Offices

For a current list of our domestic and international sales offices go to the Lantronix web site at www.lantronix.com/about/contact/.

Disclaimer and Revisions

Operation of this equipment in a residential area is likely to cause interference, in which case the user, at his or her own expense, will be required to take whatever measures may be required to correct the interference.

Note: *This product has been designed to comply with the limits for a Class B digital device pursuant to Part 15 of FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with this guide, may cause harmful interference to radio communications.*

Changes or modifications to this device not explicitly approved by Lantronix will void the user's authority to operate this device.

Note: *With the purchase of XPort Pro, the OEM agrees to an OEM firmware license agreement that grants the OEM a non-exclusive, royalty-free firmware license to use and distribute the binary firmware image provided, only to the extent necessary to use the XPort Pro hardware. For further details, please see the XPort Pro OEM firmware license agreement.*

Date	Rev.	Comments
September 2009	A	Initial Draft

For the latest revision of this product document, please check our online documentation at www.lantronix.com/support/documentation.html.

Contents

Copyright and Trademark	2
Contacts	2
Disclaimer and Revisions	2
List of Figures	4
List of Tables.....	4
1. Introduction	5
About the Integration Guide.....	5
Additional Documentation.....	5
2. Description and Specifications	6
The XPort Pro Features	6
XPort Pro Block Diagram	7
PCB Interface.....	7
Ethernet Interface	9
LEDs	9
Dimensions	10
Recommended PCB Layout	11
Product Information Label.....	12
Electrical Specifications	12
Functional Specifications	13
A: XPort Pro 485 Connection Diagram	14
B: Compliance Information	15
C: Warranty	17

List of Figures

Figure 2-1. Side View of the XPort Pro	7
Figure 2-2. XPort Pro Block Diagram	7
Figure 2-3. XPort Pro LEDs	9
Figure 2-4. Front View	10
Figure 2-5. Bottom View	10
Figure 2-6. Side View.....	10
Figure 2-7. PCB Layout	11
Figure 2-8. Product Label	12

List of Tables

Table 2-1. PCB Interface Signals.....	8
Table 2-2 Ethernet Interface Signals (Industry Standards)	9
Table 2-3. Absolute Maximum Ratings.....	12
Table 2-4. Recommended Operating Conditions	12
Table 2-5. Technical Specifications	13

1. Introduction

About the Integration Guide

This guide provides the information needed to integrate the XPort Pro™ device server into a customer printed circuit board. This manual is intended for engineers responsible for integrating the XPort Pro into their product.

Note: This document covers XPort Pro™ Device Server versions XPP1002000-01R, XPP100200S-01R, XPP1003000-01R, and XPP100300S-01R.

Additional Documentation

The following guides are available on the product CD and the Lantronix Web site (www.lantronix.com)

<i>XPort Pro™ User Guide</i>	Provides information needed to configure, use, and update the XPort Pro firmware.
<i>XPort™ Universal Demo Board Quick Start</i>	Provides the steps for getting the XPort Pro up and running.
<i>XPort™ Universal Demo Board User Guide</i>	Provides information needed to use the XPort Pro on the demo board.
<i>DeviceInstaller User Guide</i>	Provides instructions for using the Windows-based utility to configure the XPort Pro and other Lantronix device servers.
<i>Com Port Redirector User Guide</i>	Provides information on using the Windows-based utility to create a virtual com port.

2. Description and Specifications

The XPort® Pro™ is Lantronix' most powerful, self-contained embedded networking module. Footprint compatible with the popular XPort® and running either Linux or Evolution OS™ operating systems, the XPort Pro eliminates the complexity of designing network connectivity into a product and allows you to deploy advanced applications on the edge device itself. The thumb-sized XPort Pro provides everything you need in a single embedded solution. It effortlessly handles demanding applications with the power of a high-speed, advanced architecture 32-bit processor. And with ample built-in memory, it allows virtually unlimited flexibility for customization and application enablement.

XPort Pro provides bullet-proof security by offering a variety of robust data encryption and authentication options. What's more, the option to run Linux, with IPv6 built in, enables you to deploy custom applications and take advantage of the large feature libraries available for Linux developers. XPort Pro also includes Lantronix' patent pending VIP (Virtual IP) Access™ technology, which allows for seamless integration with the ManageLinx™ remote services enablement platform. Critical agency certification has already been completed by Lantronix, reducing your test time and speeding time-to-market.

The XPort Pro Features


The XPort Pro contains a 32-bit Freescale processor, with 8 Mbytes of SDRAM, 16 Mbytes of Flash and an integrated Broadcom 10/100 PHY.

The XPort Pro also contains the following:

- ◆ 3.3-volt serial interface
- ◆ All I/O pins are 3.3V tolerant
- ◆ Ethernet magnetics
- ◆ Power supply filters
- ◆ Reset circuit
- ◆ +1.5V regulator
- ◆ Crystals and Ethernet LEDs

The XPort Pro requires +3.3-volt power and is designed to operate in an extended temperature range (see technical data).


Figure 2-1. Side View of the XPort Pro

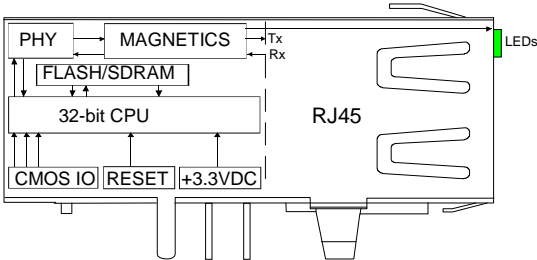

XPort Pro Block Diagram

The following drawing is a block diagram of the XPort Pro showing the relationships of the components.

Figure 2-2. XPort Pro Block Diagram

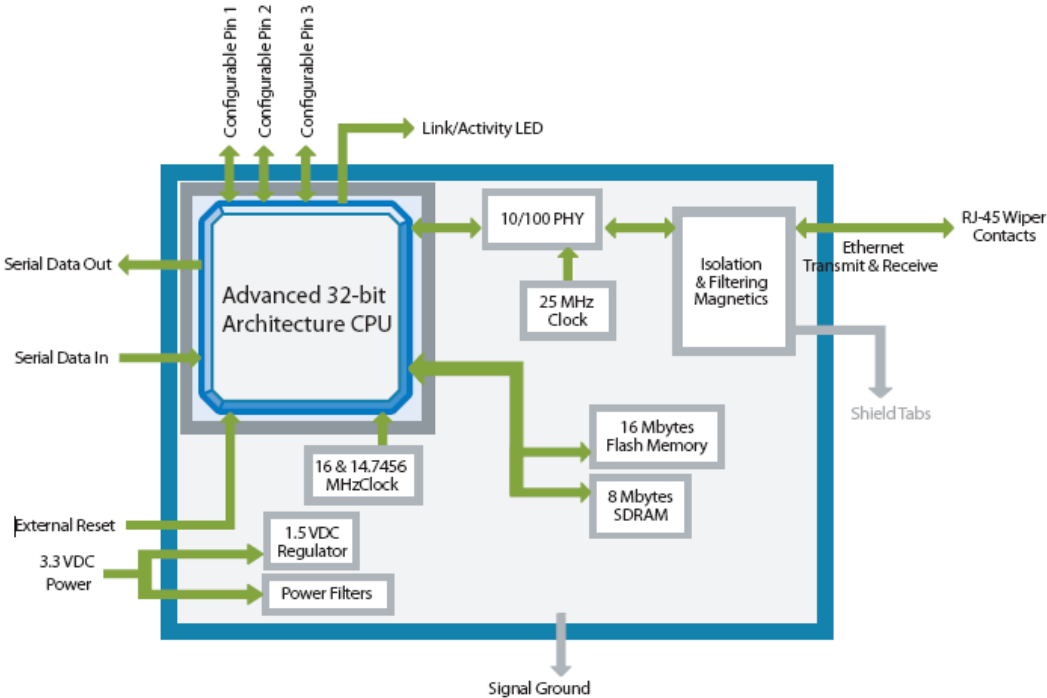

PCB Interface

The XPort Pro has a serial port compatible with data rates up to 921600 bps. The serial signals (pins 4–8) are 3.3V CMOS logic level. The serial interface pins include +3.3V, ground, and reset. The serial signals connect to an internal UART driven at 3.3V. For applications requiring an external cable running with RS-232 or RS422/485 voltage levels, the XPort Pro must interface to a serial transceiver chip. We supply an RS-232 transceiver on the XPort Universal Demo Board for this purpose.

Note: The standard baud rate of 460800 bps is not supported.

Table 2-1. PCB Interface Signals

Signal Name	XPort Pro Pin #	Primary Function
GND	1	Circuit ground
3.3V	2	+3.3V power in
Reset	3	External reset in
Data Out	4	Serial data out (driven by built-in UART)
Data In	5	Serial data in (input to built-in UART)
CP1/RTS (Configurable Pin 1)	6	<p>CP1 can be configured as follows:</p> <ul style="list-style-type: none"> • Flow control: RTS (Request to Send) output driven by the built-in UART for connection to CTS of attached device. • Programmable input/output: CP1 can be driven or read through software control, independent of serial port activity. • RS485 Transmit Enable: In RS485 mode, CP1 is driven by the built-in UART for connection to the transmit enable pin of an RS485 Transceiver.
CP2/DTR (Configurable Pin 2)	7	<p>CP2 can be configured as follows:</p> <ul style="list-style-type: none"> • Modem control: DTR (Data Terminal Ready) output driven by the built-in UART for connection to DCD of attached device. • Programmable input/output: CP2 can be driven or read through software control, independent of serial port activity.
CP3/CTS/DCD (Configurable Pin 3)	8	<p>CP3 can be configured as follows:</p> <ul style="list-style-type: none"> • Flow control: CTS (Clear to Send) input read by the built-in UART for connection to RTS of attached device. • Modem control: DCD (Data Carrier Detect) input read by the built-in UART for connection to DTR of attached device. • Programmable input/output: CP3 can be driven or read through software control, independent of serial port activity.

Ethernet Interface

The Ethernet interface magnetics, RJ45 connector, and Ethernet status LEDs are all in the device server shell. The XPort Pro PHY is Auto MDIX capable allowing connection to either straight through or cross over Ethernet cables.

Table 2-2 Ethernet Interface Signals (Industry Standards)


Signal Name	DIR	Contact	Primary Function
TX+	Out	1	Differential Ethernet transmit data +
TX-	Out	2	Differential Ethernet transmit data -
RX+	In	3	Differential Ethernet receive data +
RX-	In	6	Differential Ethernet receive data -
Not used		4	Terminated
Not used		5	Terminated
Not used		7	Terminated
Not Used		8	Terminated
SHIELD			Chassis ground

LEDs

The XPort Pro contains the following LEDs:

- ◆ Link (solid green, left LED)
- ◆ Activity (blinking amber, right LED)

Figure 2-3. XPort Pro LEDs

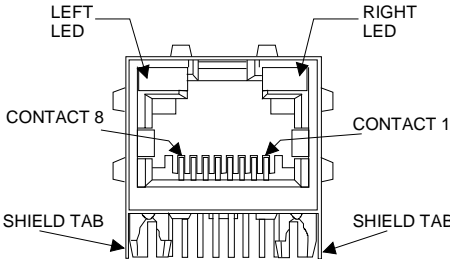

Dimensions

The XPort Pro dimensions are shown in the following drawings.

Figure 2-4. Front View

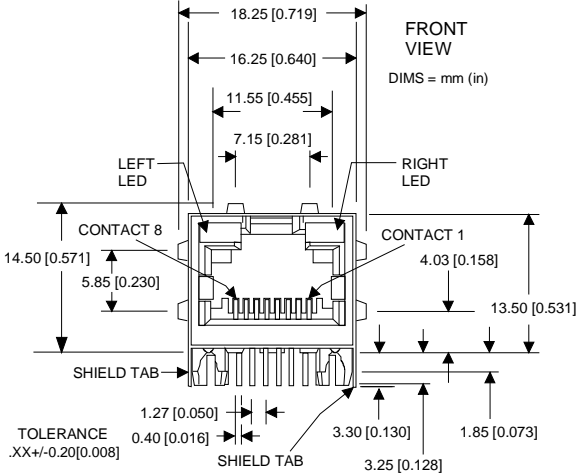


Figure 2-5. Bottom View


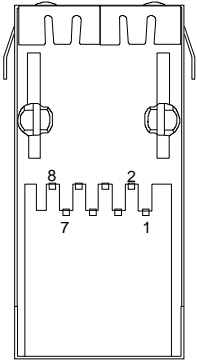


Figure 2-6. Side View

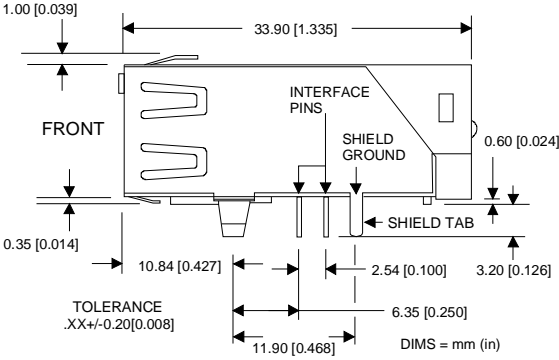

Recommended PCB Layout


The hole pattern and mounting dimensions for the XPort Pro device server are shown in the following drawing. For proper heat dissipation, it is recommended that the PCB have approximately 1 square inch of copper attached to the shield tabs. The shield tabs are an important source of heat sinking for the device.

The XPort Pro shield is considered “chassis ground” and should be separate from “signal ground”. ESD near the XPort Pro at the panel opening will likely jump to the shield.

We recommend using high voltage (~200V), low ESR, 0.01 uF capacitors to connect chassis ground to both signal ground and 3.3V. This will cause any voltage spike from ESD to be imparted equally to both signal ground and 3.3V with no net voltage increase between 3.3V and signal ground. For the highest level of ESD protection of the XPort Pro, it is recommended that the shield not be directly connected to signal GND. The metal shield fingers around the XPort Pro’s RJ45 should physically contact the product housing when the housing is metal, or metallic coated.

The shield is also a heat sink for the internal 32-bit Processor. As in all heat sinking applications, the more copper connected to the heat sink the better. Adding 1 inch square inch of copper flood on the PCB is adequate to allow the XPort Pro to work up to +85°C. If the application does not expect to see temperatures up to +85°C the heat sink may be smaller than 1 square inch.

Figure 2-7. PCB Layout

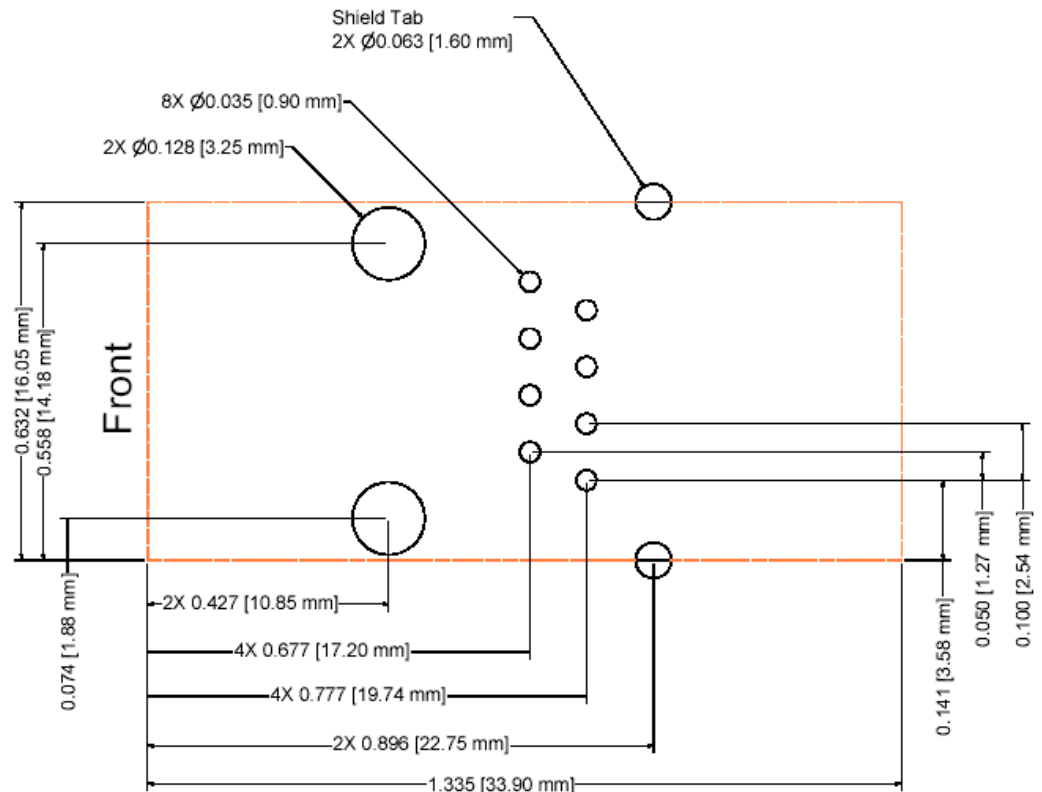

Product Information Label

The product information label contains important information about your specific unit, such as its product ID (name), bar code, part number, and Ethernet (MAC) address.

Figure 2-8. Product Label



Electrical Specifications

Caution: Stressing the device above the rating listed in this table may cause permanent damage to the XPort Pro. Exposure to Absolute Maximum Rating conditions for extended periods may affect the XPort Pro's reliability.

Table 2-3. Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Units
Supply Voltage	V_{CC}	0	3.6	Vdc
CPx, Reset, Data In, Data Out Voltage	V_{CP}	-0.3	$V_{CC} + 0.05$	Vdc
Operating Temperature		-40	85	°C
Storage Temperature		-40	85	°C

Table 2-4. Recommended Operating Conditions

Parameter	Symbol	Min	Typical	Max	Units
Supply Voltage	V_{CC}	3.15	3.3	3.46	Vdc
Supply Voltage Ripples	V_{CC_PP}			2	%
Supply Current	I_{CC}		225		mA
Supply Reset Threshold	V_{RST}	2.85	2.93	3.00	Vdc
CP2, CP3 Pull-ups	R_{PU}		100		Kohm
CP1 Pull-up	R_{PU}		10		
CPx, RX Input Low Voltage	V_{CP_IL}			0.8	Vdc
CPx, RX Input High Voltage	V_{CP_IH}	2			Vdc
CPx, TX Output Low Voltage ($I_{OL} = 4 \text{ mA}$)	V_{CP_OL}			0.4	Vdc
CPx, TX Output High Voltage ($I_{OH} = -4 \text{ mA}$)	V_{CP_OH}	$V_{CC} - 0.4$			Vdc

Note: All pins are not 5V tolerant.


Functional Specifications

Table 2-5. Technical Specifications

Category	Description
CPU, Memory	Freescale 32-bit Coldfire, 8 Mbyte SDRAM, 16-Mbyte flash,
Firmware	Upgradeable via TFTP, FTP, and serial port
Reset Circuit	Internal 140ms minimum power-up reset pulse. Power-drop reset triggered at 2.95V. External reset input causes an internal 140ms minimum reset.
Serial Interface	CMOS (Asynchronous) 3.3V-level signals Rate is software selectable and customizable: 300 bps to 921600 bps <i>Note: The standard baud rate of 460800 bps is not supported.</i>
Serial Line Formats	Data bits: 7 or 8 Stop bits: 1 or 2 Parity: odd, even, none
Modem Control	DTR, DCD
Flow Control	XON/XOFF (software), CTS/RTS (hardware), None
Programmable I/O	3 PIO pins (software selectable), sink or source 4mA max.
Network Interface	RJ45 Ethernet 10Base-T or 100Base-TX (auto-sensing)
Compatibility	Ethernet: Version 802.3u
Protocols Supported	ARP, UDP/IP, TCP/IP, Telnet, ICMP, SNMP, DHCP, BOOTP, TFTP, FTP, Auto IP, SMTP, HTTPS, and HTTP
LEDs	10Base-T and 100Base-TX Link Activity
Management	Internal web server, SNMP (read only) Serial login, Telnet login, DeviceInstaller utility, SSH
Security	Password protection, locking features, optional Rijndael 256-bit encryption
Internal Web Server	Serves static web pages and Java applets Storage capacity: 1MB
Weight	0.34 oz (9.6 grams)
Material	Metal shell, thermoplastic case
Temperature	Operating range: -40°C to +85°C (-40° F to 185°F)
Shock/Vibration	Non-operational shock: 500 g's Non-operational vibration: 20 g's
Warranty	Two year limited warranty
Included Software	Windows™ 98/NT/2000/XP-based Device Installer configuration software and Windows™-based Com Port Redirector
Compliance	Regulatory Approvals <ul style="list-style-type: none"> • FCC Part 15, Subpart B, Class B – ICES-003 Issue 4 (2004), Class B • EN55022:2006 and EN55024:1998 + A1:2001 + A2:2003 • AS/NZS CISPR22:2006 • VCCI V-3/2009.04 • EN 61000-3-2:2006, EN 61000-3-3:1995+A1:2001+A2:2005

A: XPort Pro 485 Connection Diagram

The following example illustrates a connection between the XPort Pro and an external transceiver IC:

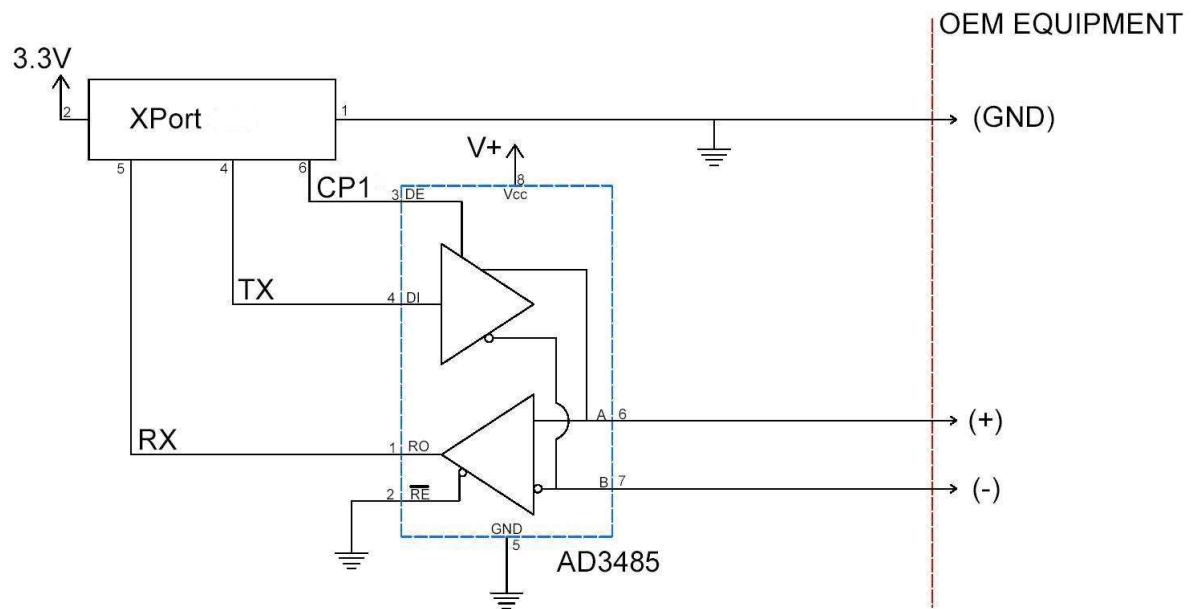

B: Compliance Information

(According to ISO/IEC Guide 22 and EN 45014)

Manufacturer's Name & Address:

Lantronix 15353 Barranca Parkway, Irvine, CA 92618 USA

Declares that the following product:

Product Name Model: XPort Pro Embedded Device Server

Conforms to the following standards or other normative documents:

Electromagnetic Emissions/Immunity:

- FCC Part 15, Subpart B, Class B
- ICES-003 Issue 4 (2004), Class B
- EN55022:2006 and EN55024:1998 + A1:2001 + A2:2003
- AS/NZS CISPR22:2006
- VCCI V-3/2009.04
- EN 61000-3-2:2006, EN 61000-3-3:1995+A1:2001+A2:2005

Manufacturer's Contact:

Lantronix
15353 Barranca Parkway
Irvine, CA 92618 USA
Tel: (800) 526-8766
Tel: (949) 453-3990
Fax: (949) 450-7249

RoHS Notice:

All Lantronix products in the following families are China RoHS-compliant and free of the following hazardous substances and elements:

- Lead (Pb)
- Mercury (Hg)
- Polybrominated biphenyls (PBB)
- Cadmium (Cd)
- Hexavalent Chromium (Cr (VI))
- Polybrominated diphenyl ethers (PBDE)

Product Family Name	Toxic or hazardous Substances and Elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (Cr (VI))	Polybrominated biphenyls (PBB)	Polybrominated diphenyl ethers (PBDE)
UDS1100 and 2100	0	0	0	0	0	0
EDS	0	0	0	0	0	0
MSS100	0	0	0	0	0	0
IntelliBox	0	0	0	0	0	0
XPress DR & XPress-DR+	0	0	0	0	0	0
SecureBox 1101 & 2101	0	0	0	0	0	0
WiBox	0	0	0	0	0	0
UBox	0	0	0	0	0	0
MatchPort	0	0	0	0	0	0
SLC	0	0	0	0	0	0
XPort	0	0	0	0	0	0
WiPort	0	0	0	0	0	0
SLB	0	0	0	0	0	0
SLP	0	0	0	0	0	0
SCS	0	0	0	0	0	0
SLS	0	0	0	0	0	0
DSC	0	0	0	0	0	0

O: toxic or hazardous substance contained in all of the homogeneous materials for this part is below the limit requirement in SJ/T11363-2006.
 X: toxic or hazardous substance contained in at least one of the homogeneous materials used for this part is above the limit requirement in SJ/T11363-2006.

C: Warranty

For details on the Lantronix warranty replacement policy, go to our web site at www.lantronix.com/support/warranty.