

High-Quality 720p HD Security Camera with IR Illuminators

- Excellent 720p HD picture quality, supporting H.264 at 30 fps
- 1.3 Megapixel (1280 x 1024) maximum resolution
- Three codecs (H.264, MPEG-4, JPEG) and a dual streaming capability
- The "Exmor" CMOS sensor incorporated to realize high image quality and low noise



HD 1.3M
MEGAPIXEL

KEY FEATURES

- Built-in IR (Infrared) illuminators to assist capturing objects in the dark even under 0 lx, up to 15 m (49 feet) away.



OFF



ON

Actual images of one of Sony's HD cameras with IR illuminators.

- IP66-rated waterproof and dust-tight feature for outdoor surveillance, or indoor where water ingress may pose an issue.
- Easy Focus/Easy Zoom functions for easy installation.
- Optical Day/Night function to switch to Day or Night mode depending on the light level.
- Recording software (RealShot Manager Lite) is bundled to start recording and monitoring instantly.
- Stream Squared function to send two 4:3 aspect ratio videos in user-selectable resolutions up to SD simultaneously (Low-cost solution to replace two SD cameras located in a line).

Example



1st Streaming
VGA video of a whole



2nd Streaming
VGA video of a
cropped area

- Intelligent Motion Detection that supports DEPA.



- Analog monitor output (phono jack).
- Powered by PoE (Power over Ethernet) for simple installation.
- Equipped with a built-in heater for continued camera operation in cold weather.
- ONVIF (Open Network Video Interface Forum) conformance that ensures greater interoperability and more flexibility in building multiple-vendor systems.




SPECIFICATIONS

| SNC-CH160 | |
|------------------------------------|---|
| Camera | |
| Image device | 1/3 type progressive scan "Exmor" CMOS sensor |
| Minimum illumination | 0.50lx (Color), 0 lx (BW) (IR ON) (F1.2/AGC 42dB/50IRE (IP*)) |
| Number of effective pixels (H x V) | 1.4 Megapixel (1329 x 1049) |
| Electronic shutter speed | 1 s to 1/10000 s |
| Gain control | Auto |
| Exposure control | Auto, EV Compensation, Auto Slow Shutter |
| White balance mode | Auto (ATW, ATW-PRO), Preset, One-push WB, Manual |
| Lens type | Vari-focal lens |
| Zoom ratio | Optical 2.9X |
| Horizontal viewing angle | 85.4 to 31.2 degrees |
| Focal length | f=3.1 to 8.9 mm |
| F-number | F1.2 (Wide), F2.1 (Tele) |
| Minimum objects distance | 300 mm |
| Powered focus | Yes (Easy Focus) |
| Powered zoom | Yes (Easy Zoom) |
| IR illuminators | Yes (Wave Length: 850nm [Typical], IR LED: 21 pcs) |
| Camera Features | |
| Day/Night *1 | Yes |
| Noise reduction | Yes |
| Image | |
| Codec image size (H x V) | 1280 x 1024, 1280 x 960, 1280 x 800, 1280 x 720, 1024 x 768, 1024 x 576, 800 x 480, 768 x 576, 720 x 480, 704 x 576, 640 x 480, 640 x 368, 384 x 288, 320 x 240, 320 x 192 (H.264, MPEG-4, JPEG) |
| Video compression format | H.264, MPEG-4, JPEG |
| Codec streaming capability | Dual streaming |
| Maximum frame rate | H.264: 20fps (1280 x 1024) / 30 fps (1280 x 720) MPEG-4: 25fps (1280 x 1024) / 30 fps (1280 x 720) JPEG: 30fps (1280 x 1024) / 30 fps (1280 x 720) |
| Scene Analytics | |
| Intelligent motion detection | Yes |
| Network | |
| Protocols | IPv4, IPv6, TCP, UDP, ARP, ICMP, IGMP, HTTP, HTTPS, FTP (client only), SMTP, DHCP, DNS, NTP, RTP/RTCP, RTSP, SNMP (MIB-2) |
| ONVIF conformance | Yes |
| Number of clients | 5 |
| Authentication | IEEE802.1X |
| Analog Monitor Output | |
| Signal system | NTSC / PAL |
| Interface | |
| Ethernet | 10BASE-T / 100BASE-TX (RJ-45) |
| Analog monitor output | Phono jack x 1 |
| Sensor input | x 1, make contact, break contact |
| Alarm output | x 1, 24V AC/DC, 1A (Mechanical relay outputs electrically isolated from the camera) |
| General | |
| Mass | 1520 g (3 lb 6 oz) |
| Dimensions | ø93 x 186 mm (3 3/4 x 7 3/8 inches) ø140 x 334.8 mm (5 5/8 x 13 1/4 inches) (including arm) |
| Power requirements | PoE |
| Power consumption | 12.9 W max |
| Starting temperature | -20 to +50 °C (-4 to +122°F) |
| Working temperature | -30 to +50 °C (-22 to +122°F) |
| Storage temperature | -20 to +60 °C (-4 to +140°F) |
| Ingress protection | IP66 |
| Safety regulation | UL2044, FCC 15B Class A, IC Class A, IEC60950-1, EN55022(A)+EN55024+EN50130-4, VCCI Class A, C-Tick Class A |
| System Requirements | |
| Operating system | Microsoft Windows XP, Windows Vista(32bit), Windows 7(32bit) |
| Processor | Intel Core2 Duo 2 GHz or higher |
| Memory | 1 GB or more |
| Web browser | Microsoft Internet Explorer Ver. 6.0, Ver. 7.0, Ver. 8.0 Firefox Ver.3.5 (Plug-in free viewer only) Safari Ver.4.0 (Plug-in free viewer only) Google Chrome Ver.4.0 (Plug-in free viewer only) |
| Supplied Accessories | |
| | CD-ROM (User's Guide, SNC Toolbox) Installation manual Wire rope +M4x8 screw B&P Warranty Booklet Template |

*1 Removable IR Cut Filter.


*The SNC-CH160 includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>).

SYSTEM CONFIGURATIONS

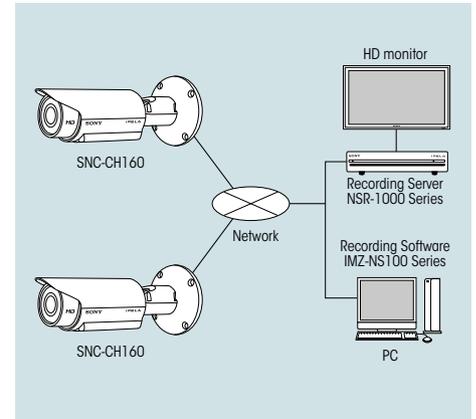

DIMENSIONS

Unit: mm (inches)

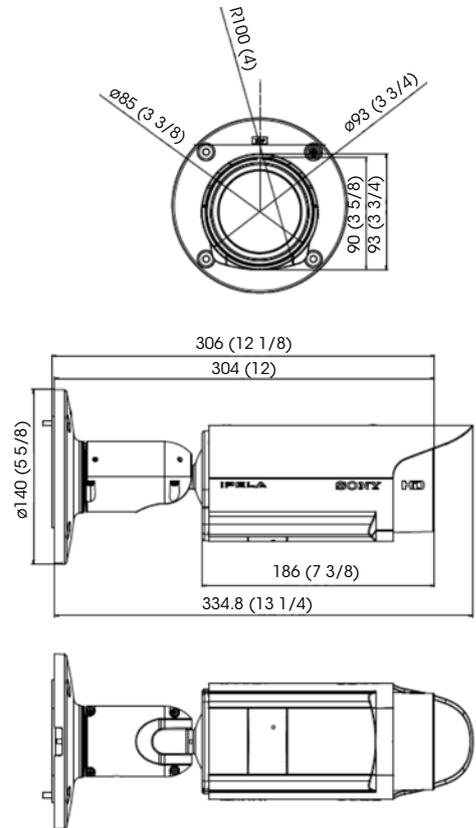

Distributed by

© 2010 Sony Corporation. All rights reserved.
 Reproduction in whole or in part without written permission is prohibited.
 Features and specifications are as subject to change without notice.
 The values for weight and dimension are approximate.
 "SONY" and "make.believe" are registered trademarks of Sony Corporation.
 IPELA and "Exmor" are trademarks of Sony Corporation.
 Windows, XP and Vista are trademarks of Microsoft Corporation.
 Core is a trademark of Intel Corporation.
 All other trademarks are the property of their respective owners.